



Hesse Lignal
inspiring you

Oxi-Reactive-Oil

Oiling naturally at the speed of light.

- Ecologically based on natural oil
- Natural matt look
- Ö-Norm certified to C 2380



For industrial coating of fl at parts.

Parquet – Doors – Furniture – Panels

Achieve the finished product in the shortest drying times

You can use our Oxi-reactive-oil to add highly resistant and lasting protection to parquet, furniture, doors and panels, all with a level of scratch resistance that cannot be achieved using a classic oil coating.

Increase your productivity! From bare wood to a packable product in less than 6 minutes. Save time and money, both via processing and the reduction of interim storage. Hesse Oxi-reactive-oil for rolling will help you optimise your processes.


Arrange an appointment with your specialist adviser right away and we will convince you of the benefits of our oil innovation.



Colourless or coloured? Both are possible with the Hesse Oxi-reactive-oil for rolling product range


	Base oils	Cover oils	Advantages
Colourless ex works	ROG A colourless base oil RWOG Base oil for pre-coating on alkaline substrates like smoked oak or thermally treated wood	RO A colourless cover oil. This is used to build up layers on ROG/RWOG, or as base and cover oil in one	• It is possible to create structures using only one RO product • Flexible system toning using ROZ colour pastes, e.g. to account for colour tone differences in the substrate
Coloured ex works	ROP Tinted base oil	ROB A tinted cover oil for creating special effects	• Reproducible colour tones • Ready to use • Easy handling

To packable product in under 6 minutes!

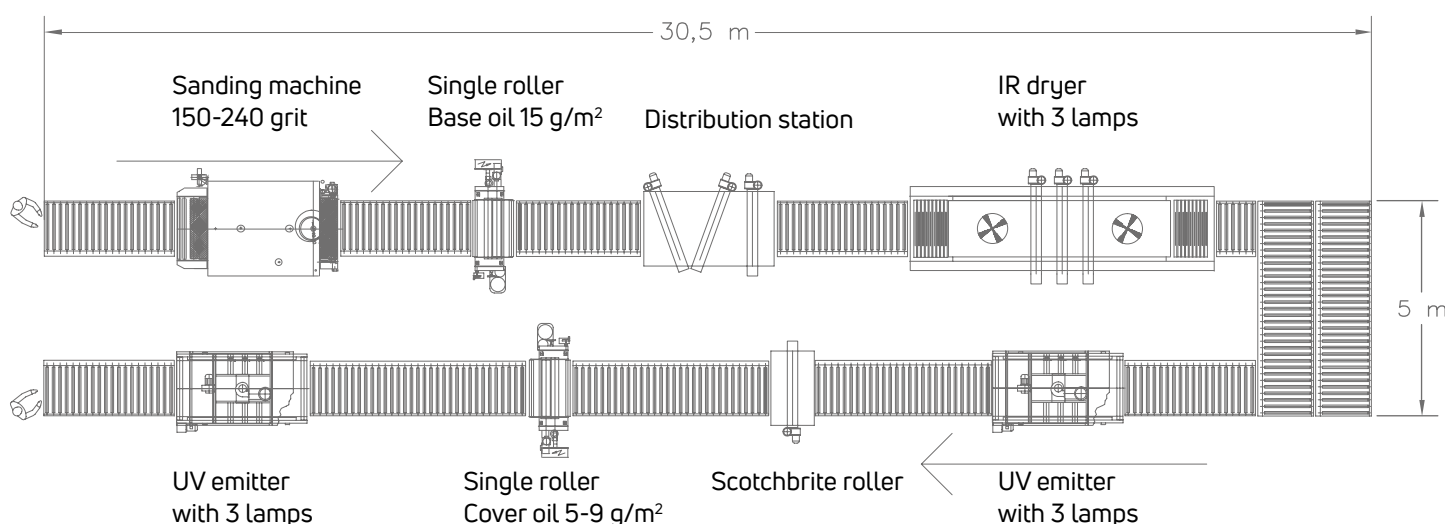

Faster. Much faster.

Competitor drying time



- Drying 16 h
- Further processing
- Coloration
- Drying 16 h
- Packing
- Minimum time required 48 h

Hesse Oxi-reactive-oil for rolling industrial drying time



- Dry in under 6 minutes
- Finished surfaces can be packed immediately
- Packing
- Time saving compared to the competition 48 h



Hesse Lignal
inspiring you

Hesse GmbH & Co. KG
Warendorfer Str. 21
D-59075 Hamm

Tel. +49 2381 963 00
Fax +49 2381 963 849

info@hesse-lignal.de
www.hesse-lignal.com



Hesse GmbH und Co. KG
zHr. Herrn Dipl.-Ing. Markus Rosenhövel
Warendorfer Str. 21
59075 Hamm
DEUTSCHLAND

2016-06-13
Dr. Günzberger / anita.guenzberger@ofi.at
Standort 2100 Wien Neustadt, Viktor Kaplan Str. 2

Betreff: Produktgruppeneinstellung nach ÖNORM C 2380:2008 für die Produkte
„Hesse Walz-Oxi-Reaktivöl RO 79861“, „Hesse Walz-Oxi-Reaktivöl RO 79851“, bzw.
„Hesse Walz-Oxi-Reaktivöl RO 7985“

Sehr geehrter Herr Dipl.-Ing. Rosenhövel

Sie haben uns am 23.05.2016 schriftlich mit der Produktgruppeneinstellung der o.s. Produkte nach ÖNORM C 2380 beauftragt. Die Produktgruppeneinstellung erfolgte vom 24.05. bis zum 10.06.2016 nach Punkt 4 der ÖNORM C 2380.

Laut Angaben des Auftraggebers enthalten die gegenständlichen Produkte jeweils eine Bindestellkombination bestehend aus 2 Einzelkomponenten. Beide Einzelkomponenten bestehen, laut Angaben der jeweiligen Hersteller, aus zumindest zu 90% natürlichen Rohstoffen.

Punkt 4 der ÖNORM C 2380 besagt: „Alle natürlichen Beschichtungsstoffe gelten nur jene, deren Bindestell zu mindestens 90% aus natürlichen Rohstoffen bestehen.“

Somit waren die Produkte

„Hesse Walz-Oxi-Reaktivöl RO 79861“,
„Hesse Walz-Oxi-Reaktivöl RO 79851“, bzw.
„Hesse Walz-Oxi-Reaktivöl RO 7985“

jeweils als „natürliches Öl“ nach ÖNORM C 2380:2008 einzustufen.

Wir hoffen, Ihnen mit der Durchführung unserer Arbeit helfen zu haben, stehen für eventuelle Rückfragen gerne zur Verfügung und verbleiben mit freundlichen Grüßen

Ing. Rainer Gensdörfer
Sachbearbeiter



Dr. Anita Günzberger
Verantwortliche Prüfstelle

Öfi - Österreichischer
Forschungsinstitut
für Holztechnologie
GmbH
Standort 2100 Wien
Neustadt, Viktor
Kaplan Str. 2

Standort:
1050 Wien, Praterstrasse 5, 1. Stock, Raum 101
Büro: 01-49 10 10 10
1190 Wien, Rottenturm 10
1120 Wien, Museum Wien, Viktor Kaplan Str. 2, Raum 101

Herstellung: 10.06.2016
Hesse GmbH & Co. KG
Warendorfer Str. 21
D-59075 Hamm
Tel. +49 2381 963 00
Fax +49 2381 963 849
info@hesse-lignal.de
www.hesse-lignal.com

