


FANTASTIC-BRILLANT with individual characteristics

Flexible - Fantastic - Brilliant



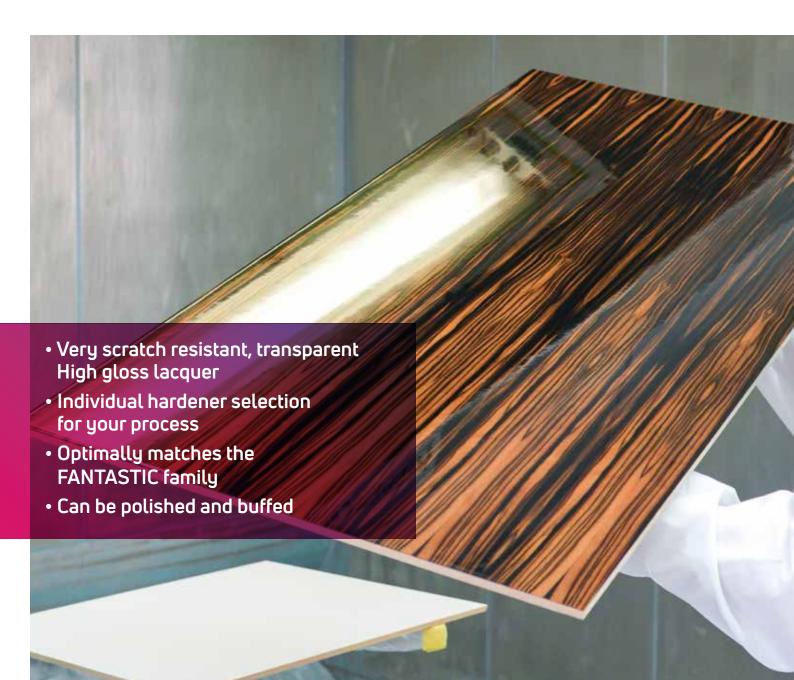

FANTASTIC-BRILLANT DU 48799

- Ideal adjustment to all process conditions due to six hardening options
- NEW: Finish to FANTASTIC-COLOR

Our FANTASTIC-BRILLANT rounds off the FANTASTIC family in terms of high gloss. It can be used as clear top coat on bare woods that already have a basecoat or to recoat onto FANTASTIC-COLOR. FANTASTIC-BRILLANT is by default hardened using PU Hardener DR 4071.

Can be used for shopfitting or on all interior fittings, including in kitchens, bathrooms and the fitting out of ship interiors.

A variety of further hardening options offer the possibility of influencing product properties and existing process conditions. FANTASTIC-BRILLANT can for instance be applied with faster drying, less dust incursion or with higher chemical resistance.

Flexible - Fantastic - Brilliant

	Result	Hardener	Mixture	Note
	Externally certified	DR 4071	(By volume) 4 : 1 (By weight) 100 : 26	Hardened using standard hardener for the FANTASTIC family. Low flammability according to IMO and DIN EN 13501 is certified.
8= 8= 8=	Universal hardening	DR 4070	(By volume) 2 : 1 (By weight) 100 : 49	For applications without specific requirements.
	High chemical resistance	DR 4078	(By volume) 5 : 2 (By weight) 100 : 40	Top chemical resistance compared to the other hardening variants.
	Highest quality	DR 4076-0001	(By volume) 10 : 3 (By weight) 100 : 31	Best values in terms of lacquer sanding, scratch resistance, brilliance and polishing capability.
	Fastest high gloss finish	DR 4085	(By volume) 3 : 1 (By weight) 100 : 35	Fastest high gloss finish among the hardening options. High gloss surfaces in just a few hours.
· ° ° · ° · ° · ° · ° · ° · ° · ° · ° ·	Lowest dust incursion	DR 4096-0002	(By volume) 2 : 1 (By weight) 100 : 50	Very fast surface drying. Therefore very resistant to dust incursion. Ideal in the event of non-optimal conditions for high gloss coating.





More information on **FANTASTIC-BRILLANT**



Hesse GmbH & Co. KG Warendorfer Str. 21 D-59075 Hamm

Tel. +49 2381 963 00 Fax +49 2381 963 849

info@hesse-lignal.de www.hesse-lignal.com











Inspire your customers with the surface effects obtained using our FANTASTIC

lacquers: quickly

order your free original sample in an impressive A4 format.





